

# Link Touch



## Product Overview

Thank you for purchasing a Link Touch display.


The LinkTouch **LNK-T10-IP-WEB** is:

- Based on the TPC101-A100 10.1" Android-powered industrial touch screen
- Designed for displaying the web interface of your Building Management System (BMS/BAS)
- Equipped with both Ethernet IP and WiFi connectivity
- HTML5 compatible
- Benefits from our preinstalled Innon application

The application allows you to configure multiple devices in one go. It also enables you to secure your Link Touch via a secure password.



The Link app default configuration password is **link1234**

## Panel Installation

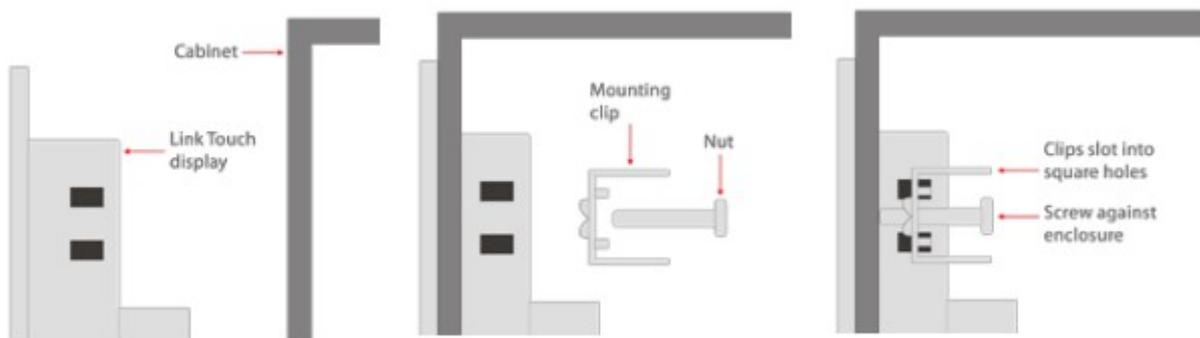

□ **Note - Mounting clips ARE included**

## Wall Installation

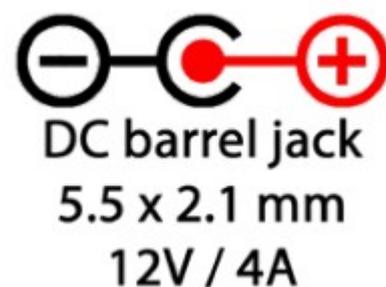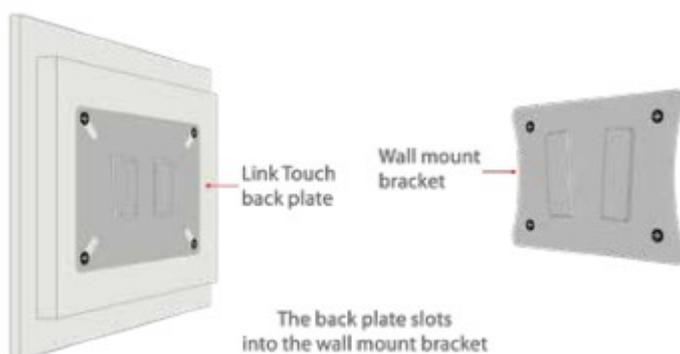

□ **Note - Bracket NOT included**

## Technical Specification

<b>Screen size</b>	10.1 inches
<b>Panel size</b>	Industrial LCD panel A+ grade
<b>Aspect ratio</b>	16:10
<b>Resolution</b>	1280 x 800
<b>Contrast</b>	800:1
<b>View angle</b>	85/85/85/85
<b>Luminance</b>	300 nit
<b>Response time</b>	5 ms
<b>Active area</b>	222.7 x 125.2 mm
<b>Display colours</b>	16.7 M (8 bit)
<b>CPU configuration</b>	RK3399 dual core Cortex A72 + quad core Cortex A53, 64 bit, 1.8 GHz
<b>Internal memory</b>	eMMC 32 GB
<b>RAM</b>	4 GB dual channel DDR3
<b>GPU</b>	Mali T864 GPU
<b>WiFi</b>	802.11b/g/n 2.4G and 5G wif
<b>Touch type</b>	Capacitive Touch Screen
<b>I/O</b>	USB2.0 x1, USB3.0 x1, Type C x1, COM232 x1, OTG x1, TF/SIM x1, DC12V x1, HDMI out x1, RJ45 gigabit x1, Audio 3.5mm out x1
<b>Panel install hole</b>	403 x 252 mm
<b>Temperature and humidity</b>	Operating: -20°C to +70°C (-4°F to 158°F), 10 to 80 %RH
	Storage: -30°C to +70°C (-22°F to 158°F), 10 to 90 %RH
<b>Certificates</b>	CE, FCC, RoHS, ISO
<b>Installation</b>	VESA (75 x 75 mm or 100 x 100 mm optional)
<b>Original part no.</b>	TPC101-A100
<b>Material</b>	Aluminium alloy

# LNK-T10-IP-WEB: Technical Drawing

